

EE-559 – Deep learning

1.6. Tensor internals

François Fleuret

<https://fleuret.org/ee559/>

Tue Feb 26 15:45:36 UTC 2019



A tensor is a view of a [part of a] **storage**, which is a low-level 1d vector.

```
>>> x = torch.zeros(2, 4)
>>> x.storage()
0.0
0.0
0.0
0.0
0.0
0.0
0.0
0.0
[torch.FloatTensor of size 8]
>>> q = x.storage()
>>> q[4] = 1.0
>>> x
tensor([[ 0.,  0.,  0.,  0.],
       [ 1.,  0.,  0.,  0.]])
```

Multiple tensors can share the same storage. It happens when using operations such as `view()`, `expand()` or `transpose()`.


```
>>> y = x.view(2, 2, 2)
>>> y
tensor([[[ 0.,  0.],
          [ 0.,  0.]],

         [[ 1.,  0.],
          [ 0.,  0.]]])
>>> y[1, 1, 0] = 7.0
>>> x
tensor([[ 0.,  0.,  0.,  0.],
        [ 1.,  0.,  7.,  0.]])
>>> y.narrow(0, 1, 1).fill_(3.0)
tensor([[[ 3.,  3.],
          [ 3.,  3.]]])
>>> x
tensor([[ 0.,  0.,  0.,  0.],
        [ 3.,  3.,  3.,  3.]])
```

The first coefficient of a tensor is the one at `storage_offset()` in `storage()`.

Incrementing index k by 1 move by `stride(k)` elements in the storage.

```
>>> q = torch.arange(0, 20).storage()
>>> x = torch.empty(0).set_(q, storage_offset = 5, size = (3, 2), stride = (4, 1))
>>> x
tensor([[ 5.,  6.],
        [ 9., 10.],
        [13., 14.]])
```

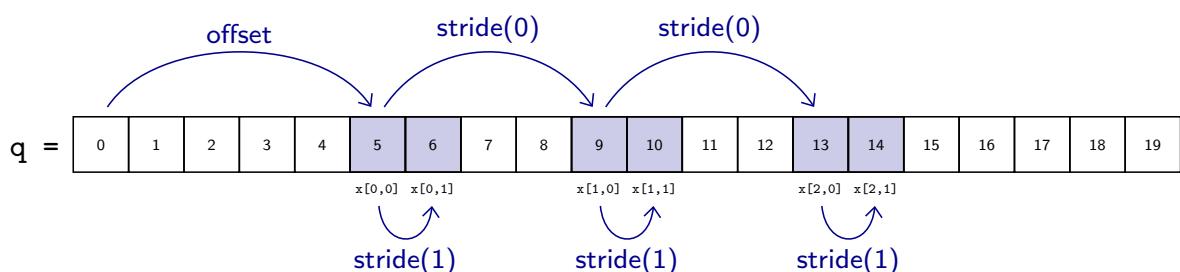

We can explicitly create different “views” of the same storage

```
>>> n = torch.linspace(1, 4, 4)
>>> n
tensor([ 1.,  2.,  3.,  4.])
>>> torch.tensor(0.).set_(n.storage(), 1, (3, 3), (0, 1))
tensor([[ 2.,  3.,  4.],
        [ 2.,  3.,  4.],
        [ 2.,  3.,  4.]])
>>> torch.tensor(0.).set_(n.storage(), 1, (2, 4), (1, 0))
tensor([[ 2.,  2.,  2.,  2.],
        [ 3.,  3.,  3.,  3.]])
```

This is in particular how transpositions and broadcasting are implemented.

```
>>> x = torch.empty(100, 100)
>>> x.stride()
(100, 1)
>>> y = x.t()
>>> y.stride()
(1, 100)
```

This organization explains the following (maybe surprising) error

```
>>> x = torch.empty(100, 100)
>>> x.t().view(-1)
Traceback (most recent call last):
  File "<stdin>", line 1, in <module>
RuntimeError: invalid argument 2: view size is not compatible with
input tensor's size and stride (at least one dimension spans across
two contiguous subspaces). Call .contiguous() before .view()
```

x.t() shares x’s storage and cannot be “flattened” to 1d.

This can be fixed with contiguous(), which returns a contiguous version of the tensor, **making a copy if needed**.

The function reshape() combines view() and contiguous().